



The housing curves apply to mineral oil with a density of 0.86 kg/dm^3 and a kinematic viscosity of $30 \text{ mm}^2/\text{s}$. In this case, the differential pressure changes proportionally to the density.

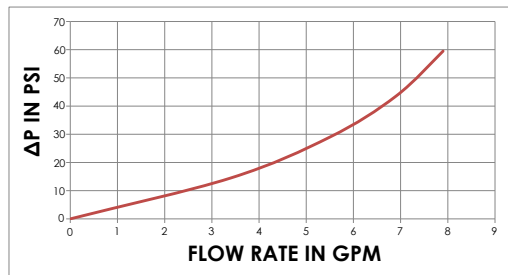

The gradient coefficients in PSI/(GPM) apply to mineral oils with a kinematic viscosity of 30 mm²/s. The pressure drop changes proportionally to the change in viscosity.

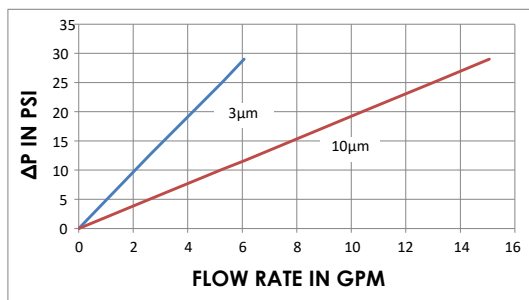

SHCS 10-24 x 3.75"
w/ Hi Collar Lock Washers
(1) Solenoid Valve

INDICATORS


ELECTRICAL: PF1-EVI

VISUAL: PF1-VI (STANDARD)

REPLACEMENT ELEMENTS

3 MICRON: D03-PFE-3

10 MICRON: D03-PFE-1 (STANDARD)

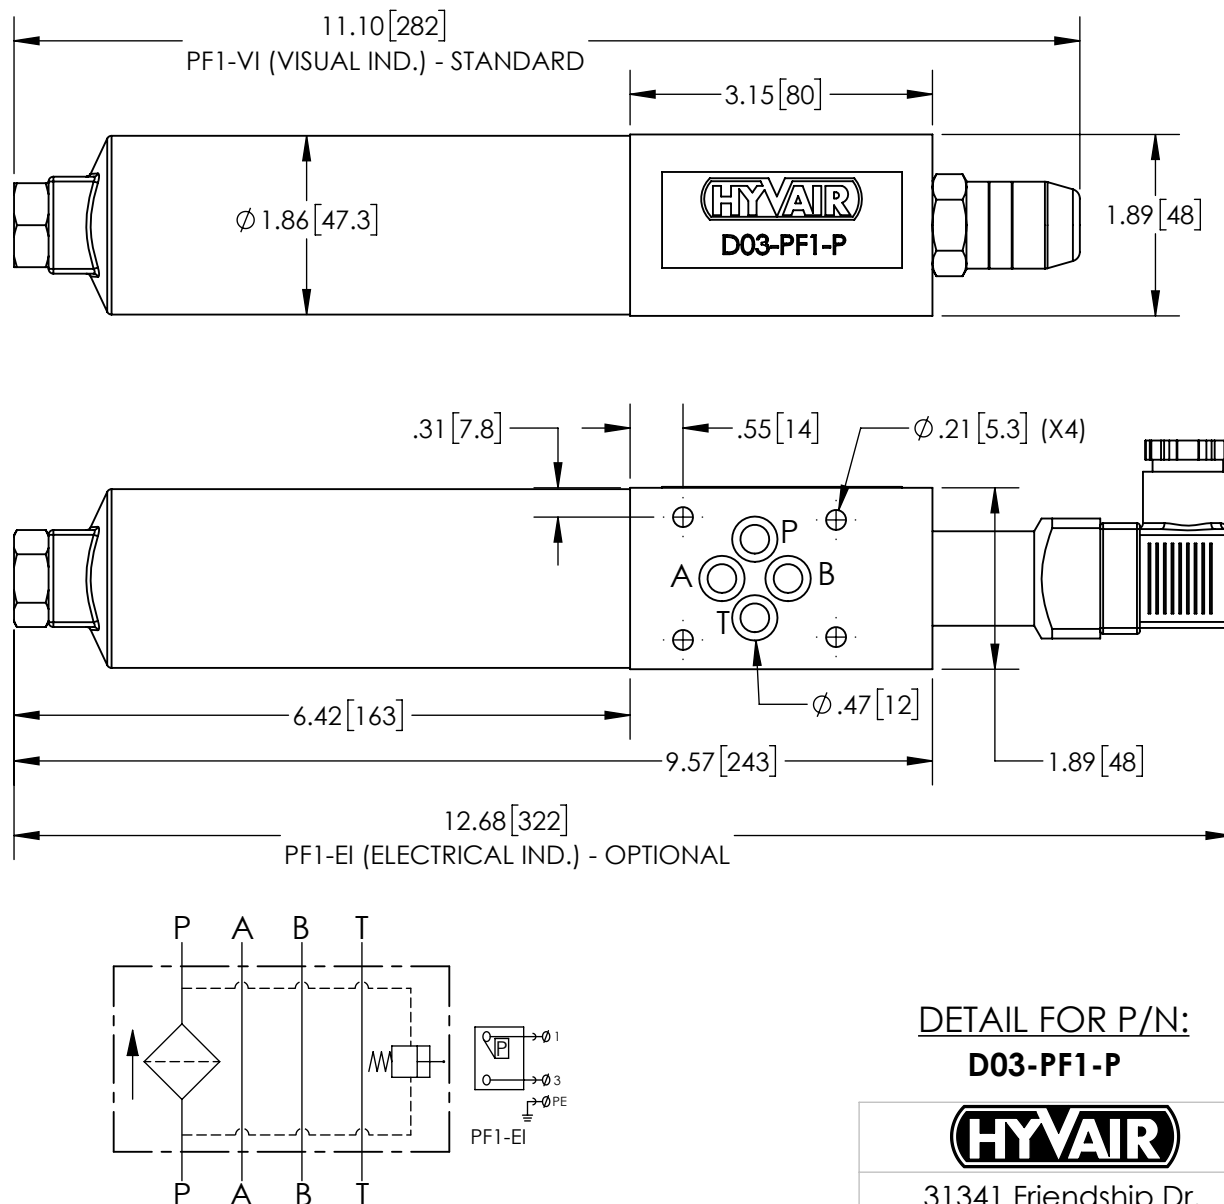

DETAIL FOR P/N:
D03-PF1-P



31341 Friendship Dr.
Magnolia, TX 77355

P: (281) 259-7768

F: (281) 259-7249

sales@hyvair.com

SCALE: 1:2	UNITS: INCH [mm]
------------	------------------