



INDUSTRIAL FLUID POWER COMPONENTS  
AND SYSTEMS


***B SERIES***

## **Bolt Kits**



### D03 Size

Torque sockethead cap screw  
40 in-lbs for D03

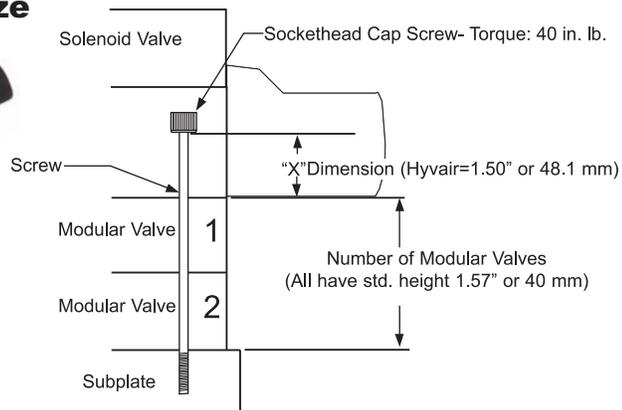

Solenoid Valve	"X" Dimension
Hyvair	1.50"
Vickers/40	1.56"
Parker	1.50"
Double A (Vickers)	1.56"
Continental	0.625"
Racine	0.87"
Rexroth	1.26"




The "X" Dimension was accurate as of the publication of this catalog. Verify in the applicable manufacturers literature.

#### Bolt Kit Ordering Information:

Part Number	Valving
BD03-H0	Solenoid valve- no modular valves use qty. (4) 10-24 SHCS X 1.75" (no lockwashers)
BD03-H1	Solenoid valve w/1 modular valve use qty. (4) 10-24 SHCS X 3.50" (with lockwashers)
BD03-H2	Solenoid valve w/2 modular valves (5.0" Long)
BD03-H3	Solenoid valve w/3 modular valves (6.6" Long)
BD03-H4	Solenoid valve w/4 modular valves (8.2" Long)
BD03-H5	Solenoid valve w/5 modular valves (9.7" Long)

### D05 Size

Torque sockethead cap screw  
105 in-lbs for D05

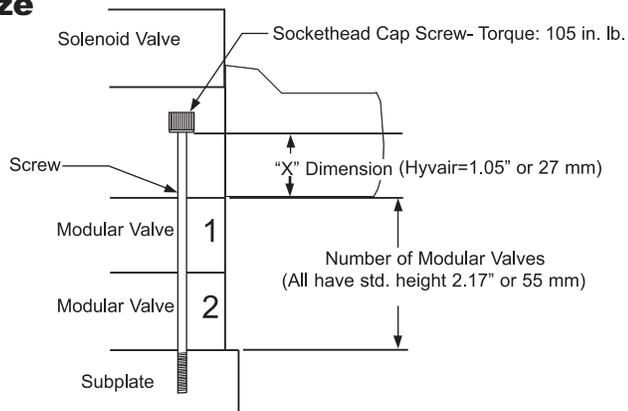

Solenoid Valve	"X" Dimension
Hyvair	1.05"
Vickers/40	1.05"
Parker	1.91"
Double A (Vickers)	1.05"
Continental	1.31"
Racine	1.38"
Rexroth	1.18"



The "X" Dimension was accurate as of the publication of this catalog. Verify in the applicable manufacturers literature.

#### Bolt Kit Ordering Information:

Part Number	Valving
BD05-H0	Solenoid valve- no modular valves use qty. (4) 1/4-20 SHCS X 1.5" (with lockwashers)
BD05-H1	Solenoid valve w/1 modular valve (3.6" Long)
BD05-H2	Solenoid valve w/2 modular valves (5.8" Long)
BD05-H3	Solenoid valve w/3 modular valves (8.0" Long)
BD05-H4	Solenoid valve w/4 modular valves (10.2" Long)
BD05-H5	Solenoid valve w/5 modular valves (12.4" Long)

Torque sockethead cap screw  
550 in-lbs for D08

### D08 Size

Use only sockethead cap screws (1/2-13 thread) x effective bolt length- Qty (6) required/ valve.  
We recommend 0.75" projection minimum into subplate and torque of 500-600 in-lbs. Hyvair "X" dimension= 1.25" (32mm).  
Add 3.35" (85mm) for each additional Hyvair D08 modular valve.