




INDUSTRIAL FLUID POWER COMPONENTS
AND SYSTEMS



P-PP-AVNPP SERIES

Push Pull Valves

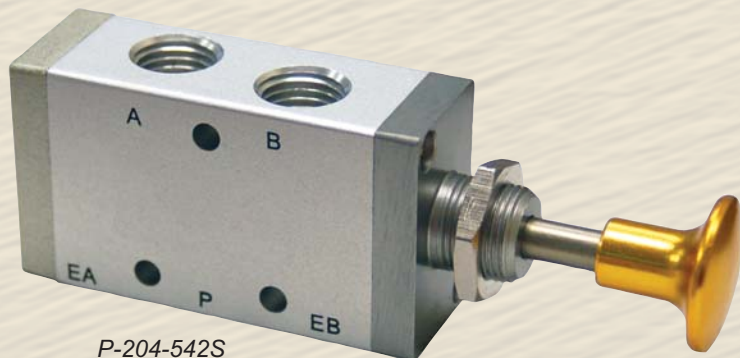

P-204-542S



AVNPP-604-542S



PP-204-542D



P-PP-AVNPP Series

Push Pull Valves

Specifications

- **Media:** Air (No other gases or liquids)
- **Operation:** Manual - Direct
- **Operating Temp. Range:** 41° - 140°F (5° - 60°C)
- **Maximum Pressure:** 150 psig (10.3 bar)
- **Working Pressure:** 0 - 135 psig (0 - 9.3 bar)
- **Lubrication:** None Required



P-204-542S



PP-204-542D




AVNPP-604-542S


Dimensional Data

mm (inches)


Push Pull Valve PP-204

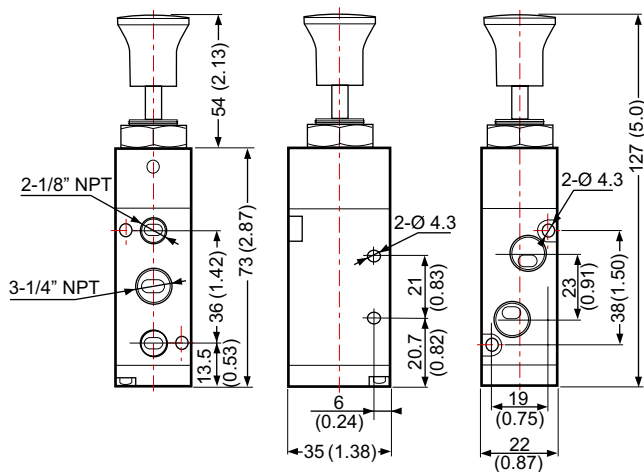

Namur Push Pull Valve AVNPP-604

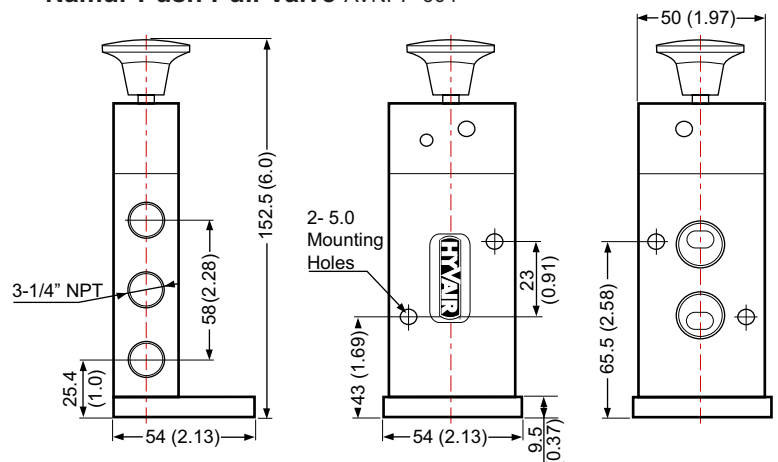

Pull Valve P-204

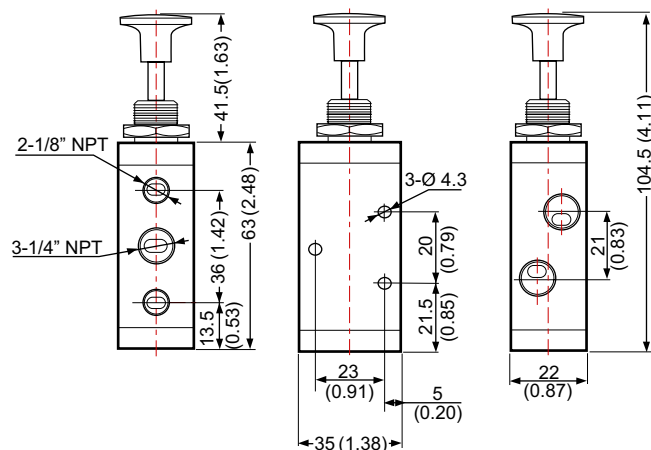

Ordering Information

PP - 204 - 542D

P Series Pull Valves	204	1/4" Ports
	406	3/8" Ports
	604	1/4" Ports
	606	3/8" Ports
PP Series Push Pull Valves		
AVNPP Series Push Pull Namur Valves		

332D	3 Port, 3 Way, 2 Pos., Detented
542D	5 Port, 4 Way, 2 Pos., Detented
542S	5 Port, 4 Way, 2 Pos., Spring Return